


XQY-PS8-0.5/6-SE

精密高频功分/合路器

precision RF power splitter/Combiner


参数/Parameters	规格/Specifications
频率范围 Frequency Range	500 ~ 6000 MHz
插入损耗 Insertion Loss	≤ 2.8dB (Excluding theoretical loss 未含理论损耗 9.0 dB)
输入驻波 Input Port VSWR	Typ.1.18 / Max.1.4
输出驻波 Output Port VSWR	Typ.1.13 / Max.1.3
隔离度 Isolation	Typ.26dB / Min.18dB
幅度平衡 Amplitude Balance	≤ 0.4dB
相位平衡 Phase Balance	±5°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	SMA-Female
承受功率 Power Rating	Splitter 分路器用时 30W; Combiner 合路器用时 2W
工作温度 Operation Temperature	-35°C ~ +75°C
表面处理 Surface Finishing	Sandblasting natural color conductive oxide 喷砂本导
外形尺寸 Outline Dimensions	113*115*12 (mm)
重量 Weight	334 (g)

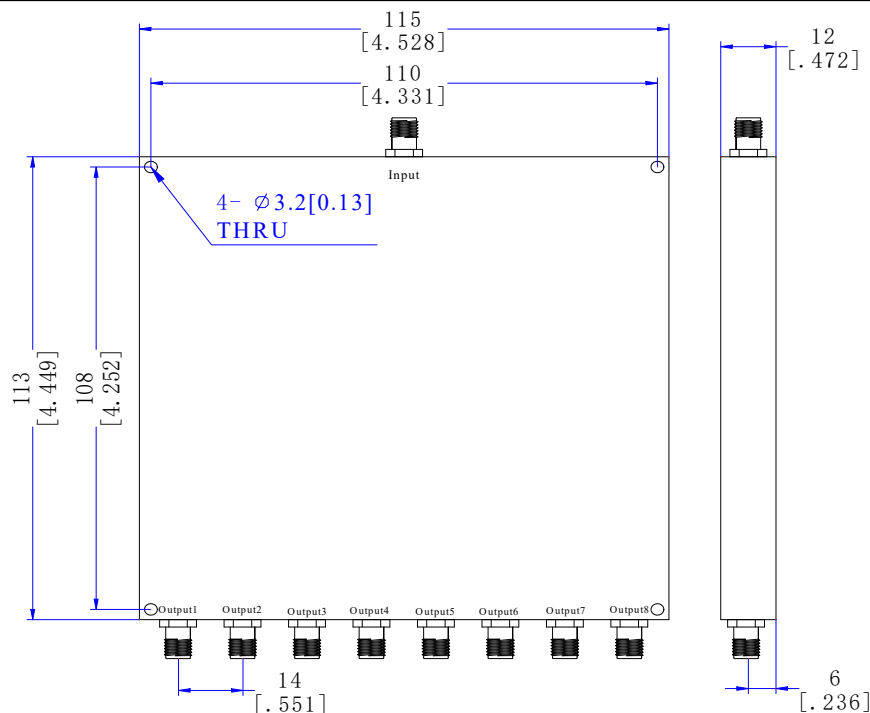

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)

Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

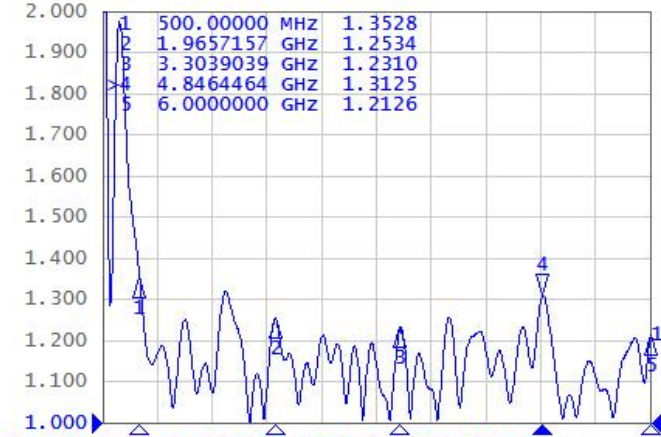

Tr2 S21 Log Mag 1.000dB/ Ref -9.000dB [F2]



Tr3 S21 Log Mag 10.00dB/ Ref 0.000dB [F2 Smo]



Tr4 S22 SWR 100.0m/ Ref 1.000 [F2]

